


TECHNICAL SPECIFICATION

ML531SA

CONSTRUCTION

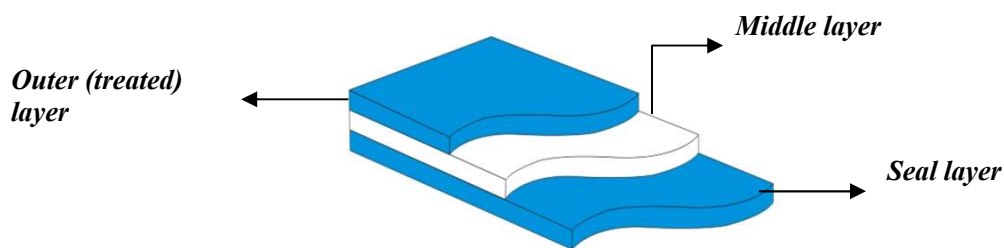

FEATURES AND APPLICATIONS

- Suitable for high speed machines.
- Suitable for both HFFS and VFFS machines.
- Suitable for PET, OPP, PVC, Metallized PET, Metalized OPP, Al, OPA or paper lamination.
- Improved tear and puncture resistance.
- Improved Hot-tack properties.
- High gloss value.
- Suitable for powdered food and bread packaging.
- Low COF value.

CERTIFICATION

Films comply with the requirements "COMMISSION REGULATION (EU) No 10/2011 on plastic materials and articles intended to come into contact with food". All films are produced in ISO 9001, ISO14001 certified facilities and have been approved by the British Retail Consortium (BRC).

PRODUCT and FOOD SAFETY

For more information please request Material Safety Data Sheet (MSDS) and Food Contact Declaration.

SHELF LIFE and STORAGE

The shelf life of the product is 6 months after production if it is stored in dry conditions, away from exposure to direct sunlight and at normal room conditions.

PROPERTIES							
Parameter	Unit			Value			Test Method
Thickness	micron			25	28	30	BAREKS TEST
	gauge			100	112	120	
Density	g/cm ³			0,92	0,92	0,92	BAREKS TEST
Yield	m ² /kg			43,48	38,82	36,23	BAREKS TEST
CoF	ln / ln			≤ 0,23			ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	15,8	17,2	17,2	ASTM D882
	TD		± 6	13	13,2	13,2	
Elongation at Break	MD	mm	± 100	190	210	210	ASTM D882
	TD		± 100	310	370	370	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	14,3	17	17	BAREKS TEST
		mm	± 50	90	110	110	
Gloss	≥%			80	80	80	ASTM D2457
Haze	≤%			16	16	16	ASTM D1003
Clarity	≥%			90	90	90	
Transmittance	≥%			85	85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.

PROPERTIES							
Parameter	Unit			Value			Test Method
Thickness	micron			35	40	45	BAREKS TEST
	gauge			140	160	180	
Density	g/cm ³			0,92	0,92	0,92	BAREKS TEST
Yield	m ² /kg			31,06	27,17	24,15	BAREKS TEST
CoF	ln / ln			≤ 0,23			ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	22,1	24,6	28	ASTM D882
	TD		± 6	16,3	18,4	24,6	
Elongation at Break	MD	mm	± 100	250	270	290	ASTM D882
	TD		± 100	370	375	400	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	17,5	18	20	BAREKS TEST
		mm	± 50	150	150	170	
Gloss	≥%			80	80	80	ASTM D2457
Haze	≤%			16	16	16	ASTM D1003
Clarity	≥%			90	90	90	
Transmittance	≥%			85	85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.

PROPERTIES							
Parameter	Unit			Value			Test Method
Thickness	micron			50	55	60	BAREKS TEST
	gauge			200	220	240	
Density	g/cm ³			0,92	0,92	0,92	BAREKS TEST
Yield	m ² /kg			21,74	19,76	18,12	BAREKS TEST
CoF	ln / ln			≤ 0,23			ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	28,2	32,00	36,2	ASTM D882
	TD		± 6	25,1	27,2	28,3	
Elongation at Break	MD	mm	± 100	320	325	350	ASTM D882
	TD		± 100	420	430	490	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	20,6	23,1	25,4	BAREKS TEST
		mm	± 50	175	175	180	
Gloss	≥%			80	80	80	ASTM D2457
Haze	≤%			16	16	16	ASTM D1003
Clarity	≥%			90	90	90	
Transmittance	≥%			85	85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.

PROPERTIES						
Parameter	Unit			Value		Test Method
Thickness	micron			65	70	BAREKS TEST
	gauge			260	280	
Density	g/cm ³			0,92	0,92	BAREKS TEST
Yield	m ² /kg			16,72	15,53	BAREKS TEST
CoF	ln / ln			≤ 0,23		ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	39	43	ASTM D882
	TD		± 6	29	35	
Elongation at Break	MD	mm	± 100	355	400	ASTM D882
	TD		± 100	490	520	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	26	26,8	BAREKS TEST
		mm	± 50	180	180	
Gloss	≥%			80	80	ASTM D2457
Haze	≤%			16	16	ASTM D1003
Clarity	≥%			90	90	
Transmittance	≥%			85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.

PROPERTIES							
Parameter	Unit			Value			Test Method
Thickness	micron			80	85	90	BAREKS TEST
	gauge			320	340	360	
Density	g/cm ³			0,92	0,92	0,92	BAREKS TEST
Yield	m ² /kg			13,59	12,79	12,08	BAREKS TEST
CoF	ln / ln			≤ 0,23			ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	54,8	55	56	ASTM D882
	TD		± 6	44	48	50	
Elongation at Break	MD	mm	± 100	420	430	440	ASTM D882
	TD		± 100	530	540	570	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	30,2	32	33	BAREKS TEST
		mm	± 50	180	180	190	
Gloss	≥%			80	80	80	ASTM D2457
Haze	≤%			16	16	16	ASTM D1003
Clarity	≥%			90	90	90	
Transmittance	≥%			85	85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.

PROPERTIES							
Parameter	Unit			Value			Test Method
Thickness	micron			100	105	120	BAREKS TEST
	gauge			400	420	480	
Density	g/cm ³			0,92	0,92	0,92	BAREKS TEST
Yield	m ² /kg			10,87	10,35	9,06	BAREKS TEST
CoF	ln / ln			≤ 0,23			ASTM D1894
Tensile Strength	MD	N /25 mm	± 6	60,1	70	77	ASTM D882
	TD		± 6	56,3	63	65	
Elongation at Break	MD	mm	± 100	450	520	520	ASTM D882
	TD		± 100	570	570	580	
Seal Strength / Elongation	3 bar 130°C 0,8 sec	N /25 mm	± 3	35	41	41,5	BAREKS TEST
		mm	± 50	210	210	210	
Gloss	≥%			80	80	80	ASTM D2457
Haze	≤%			23	23	23	ASTM D1003
Clarity	≥%			90	90	90	
Transmittance	≥%			85	85	85	

The above information is the result of laboratory tests, which are applied on samples from standard production. Since the varying conditions under which our products used are beyond our control, all of the above results are without guarantee and warranty. Users are advised to conduct their own testing of our products to determine suitability for use alone or in combination with other products.